

Open Frame LCD

Open Frame LCD




7" (16:10)

Specifications




| | |
|----------------------------|--|
| Model Name | W07T700-OFA2 |
| Panel Size | 7" (16:10) |
| Active Display Area(mm) | 152.4(H) x 91.44(V) |
| Resolution | 800x480 |
| Contrast Ratio | 500:1 (Typical) |
| Display Color | 262K (6 bit/color) |
| Brightness(cd/m2) | 300 (Typical) |
| Viewing Angle(CR>=10) | -70~70(H) ; -70~50(V) |
| Standard Input Signal | 1 x VGA, 1 x HDMI |
| Accessories | Power Adapter VGA cable HDMI Cable 13 Keys IR remote control pad (Optional) |
| Power Input | 12V DC in, with external AC to DC Adapter (100 to 240VAC) |
| Power Consumption | 10 W typical, Normal operation |
| Operating temperature | 0~50°C |
| Storage Temperature | -10~60 °C |
| Touch Screen (Optional) | P-cap. (Customized) Resistive |
| Remote Control (Optional)* | RS232 port |
| Audio (Optional)* | Audio input Stereo speakers |

* When adding the function, the outside dimension may change.

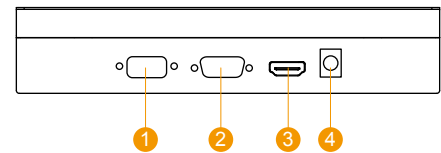

1. Touch (Optional)
2. VGA
3. HDMI
4. 12V DC-in

Mechanical Drawing

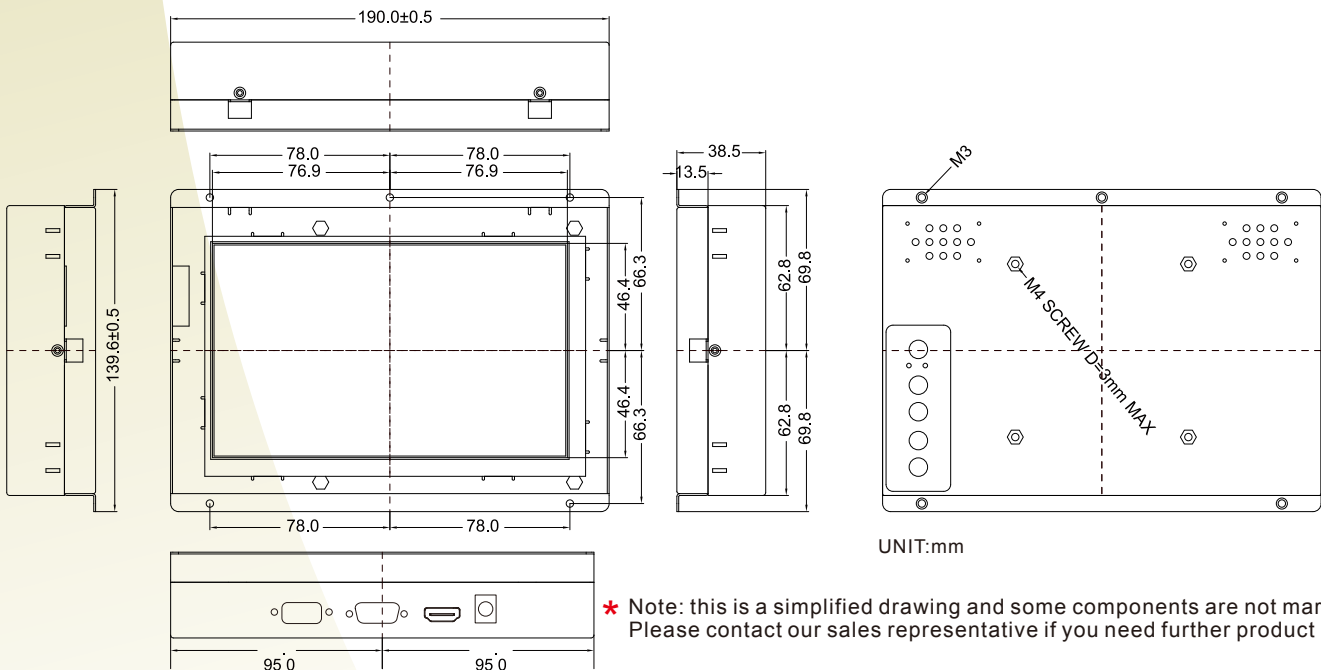

* Note: this is a simplified drawing and some components are not marked in detail. Please contact our sales representative if you need further product information.